

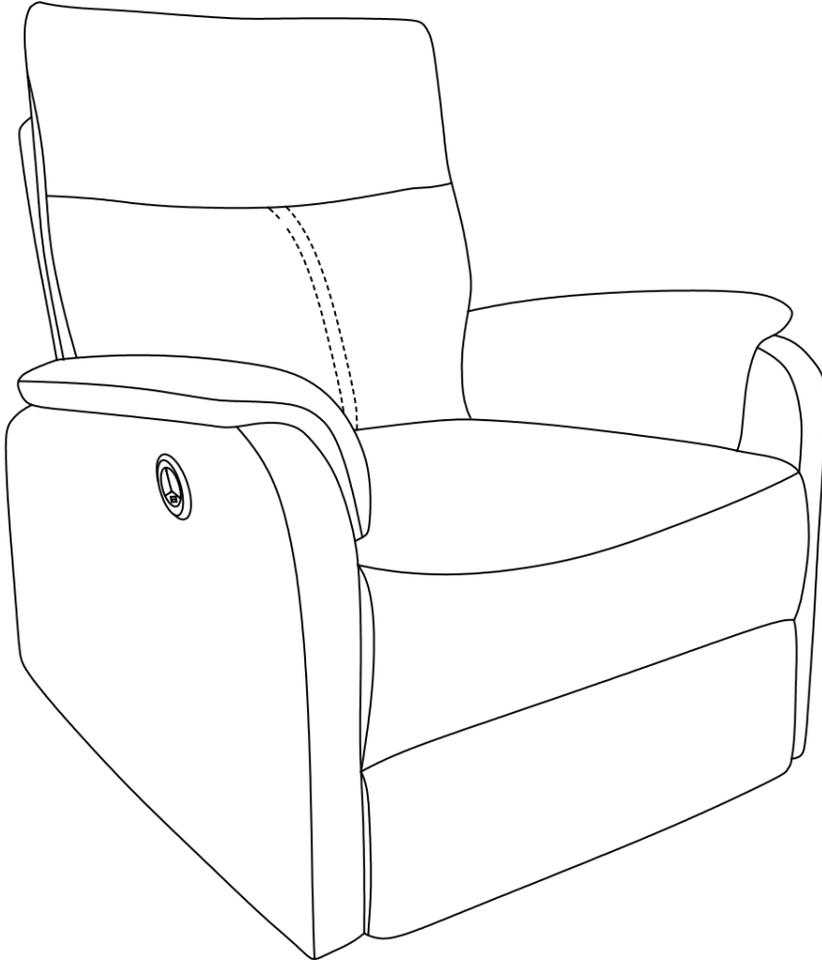
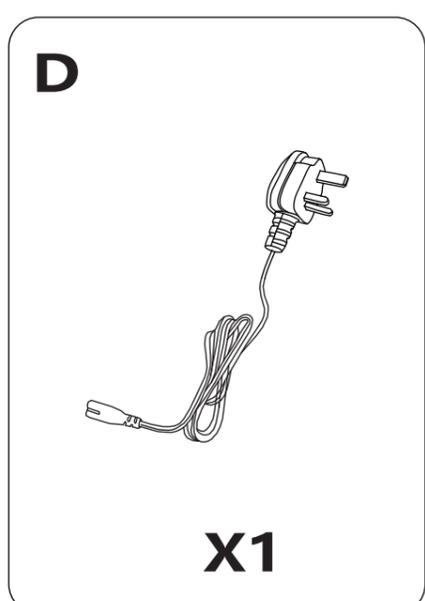
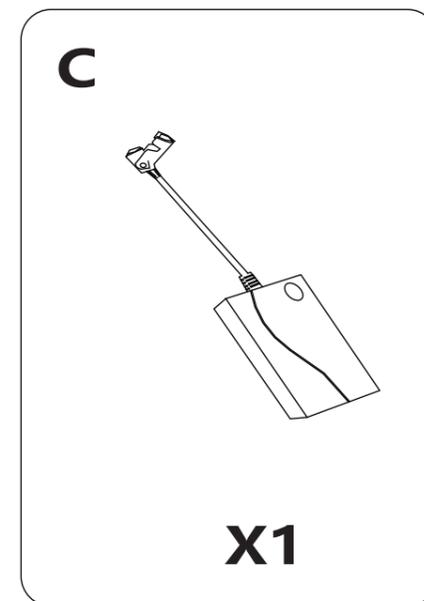


**ASSEMBLY INSTRUCTIONS**

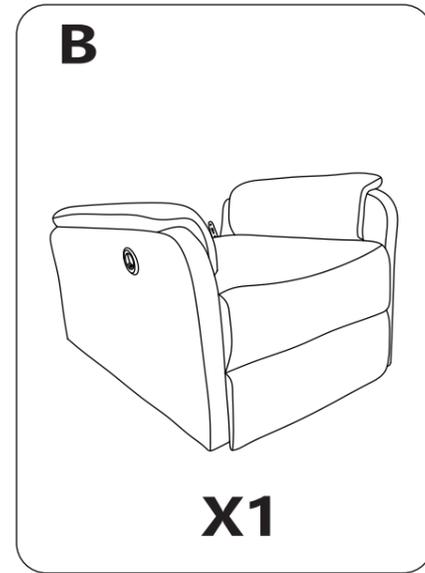


## PARTS LIST

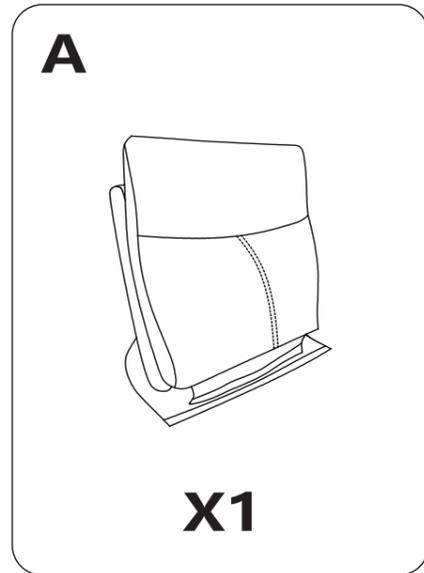


## Step1: MOUNT AHANDLE

Remove the sofa from the cardboard box, cut the cardboard box at the insertion point, and remove the power box and power cord.

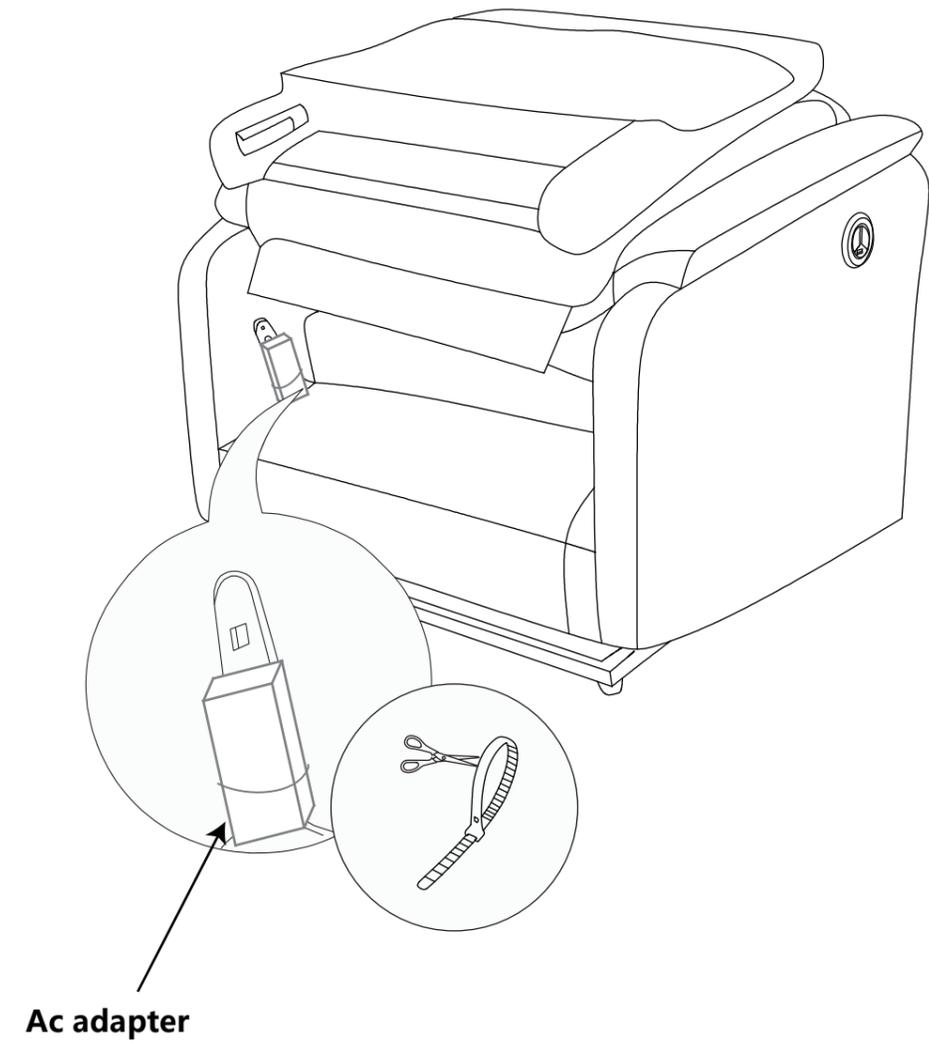


## Step2: INSTALLING BACKREST

Slide the backrest into the metallic quick connectors of the seat. Push down the backrest firmly until each side is locked into place and an audible “click” is heard.

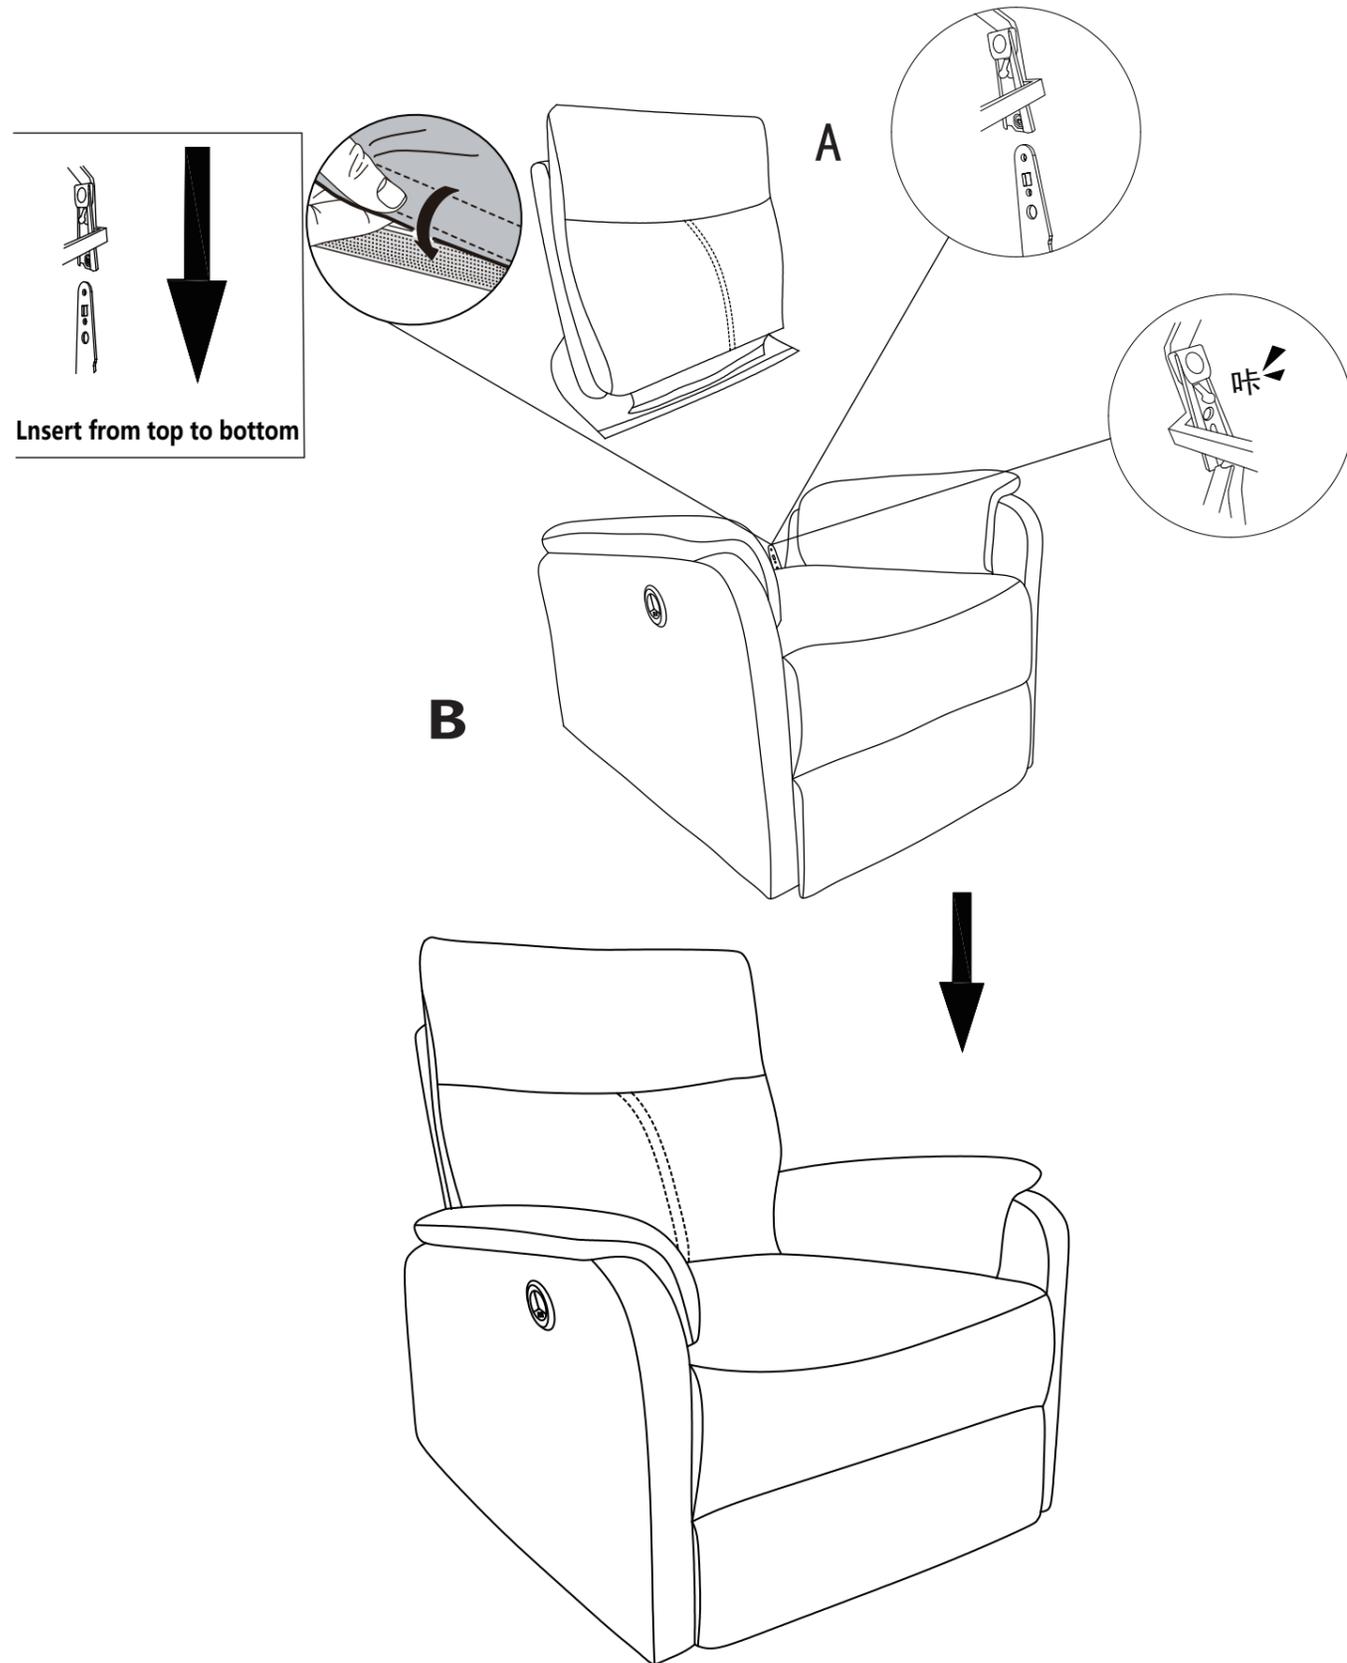


## Step3: INSTALL WIRING

① Find the power adapter (C) and connect it to the corresponding receiver. Connect one end of the adapter power cable (D) to the power adapter (C).  
Note: After all lines are connected, be sure to secure the anti detachment cover

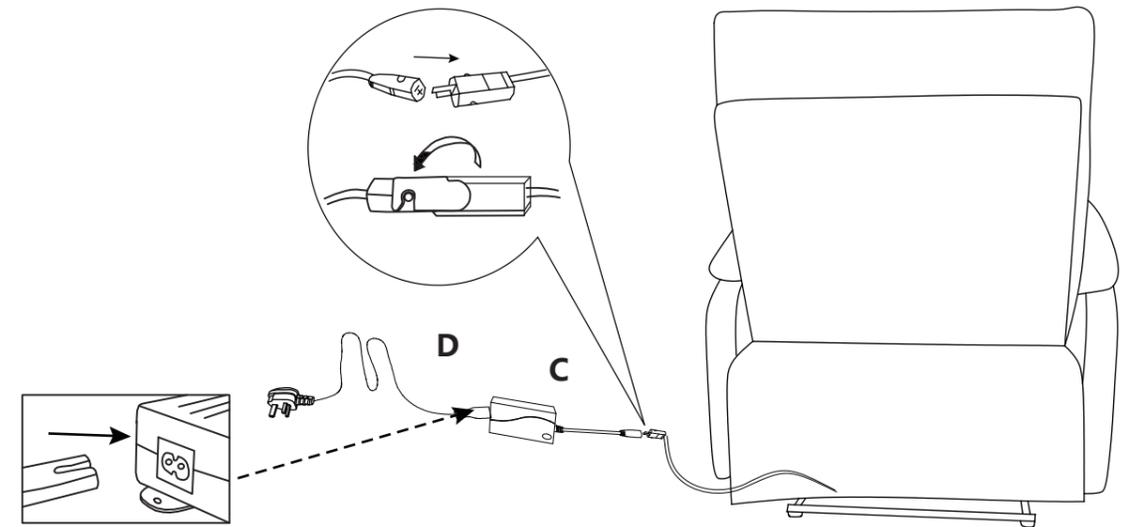


② Insert the power cord of the adapter into the power outlet.  
Note: After all lines are connected, the power box light is turned on

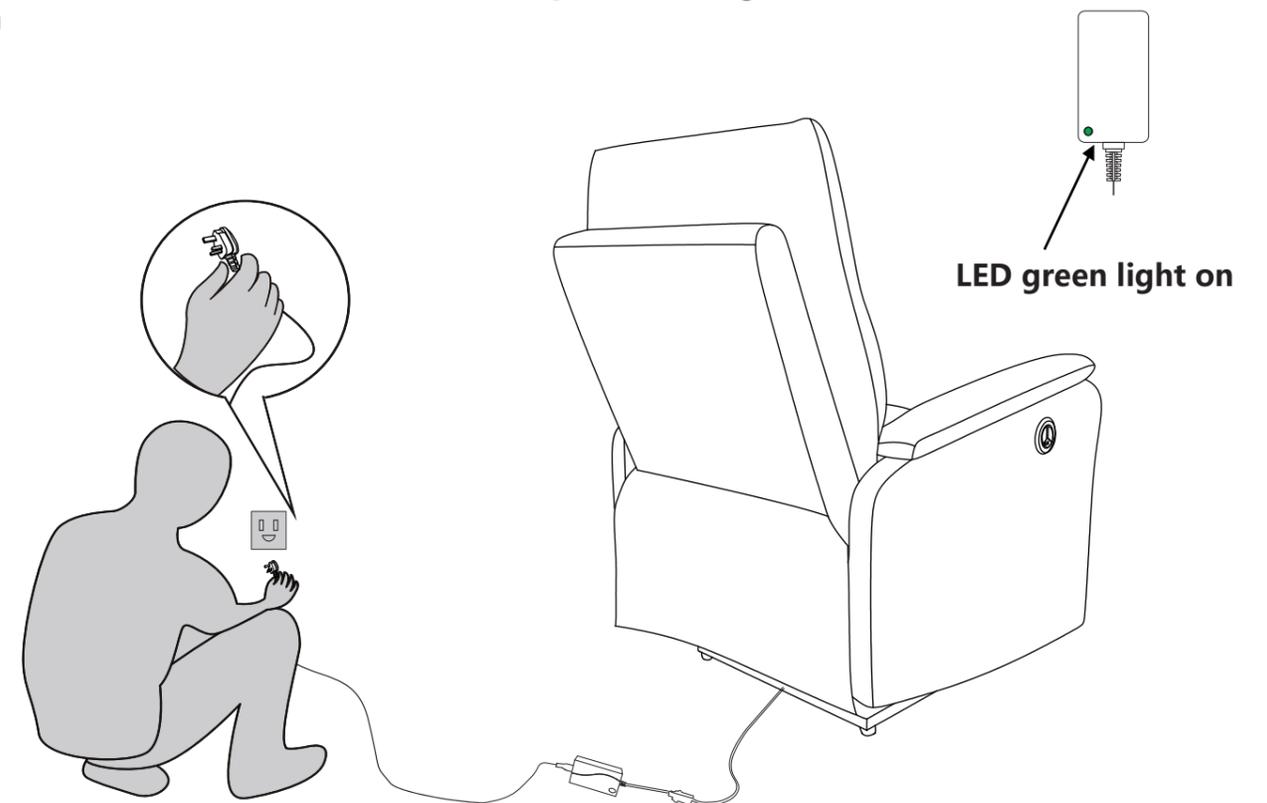

## Step4: INSTALL THE REAR CROTCH FABRIC

Attach the back cover to the bottom of the seat with Velcro.

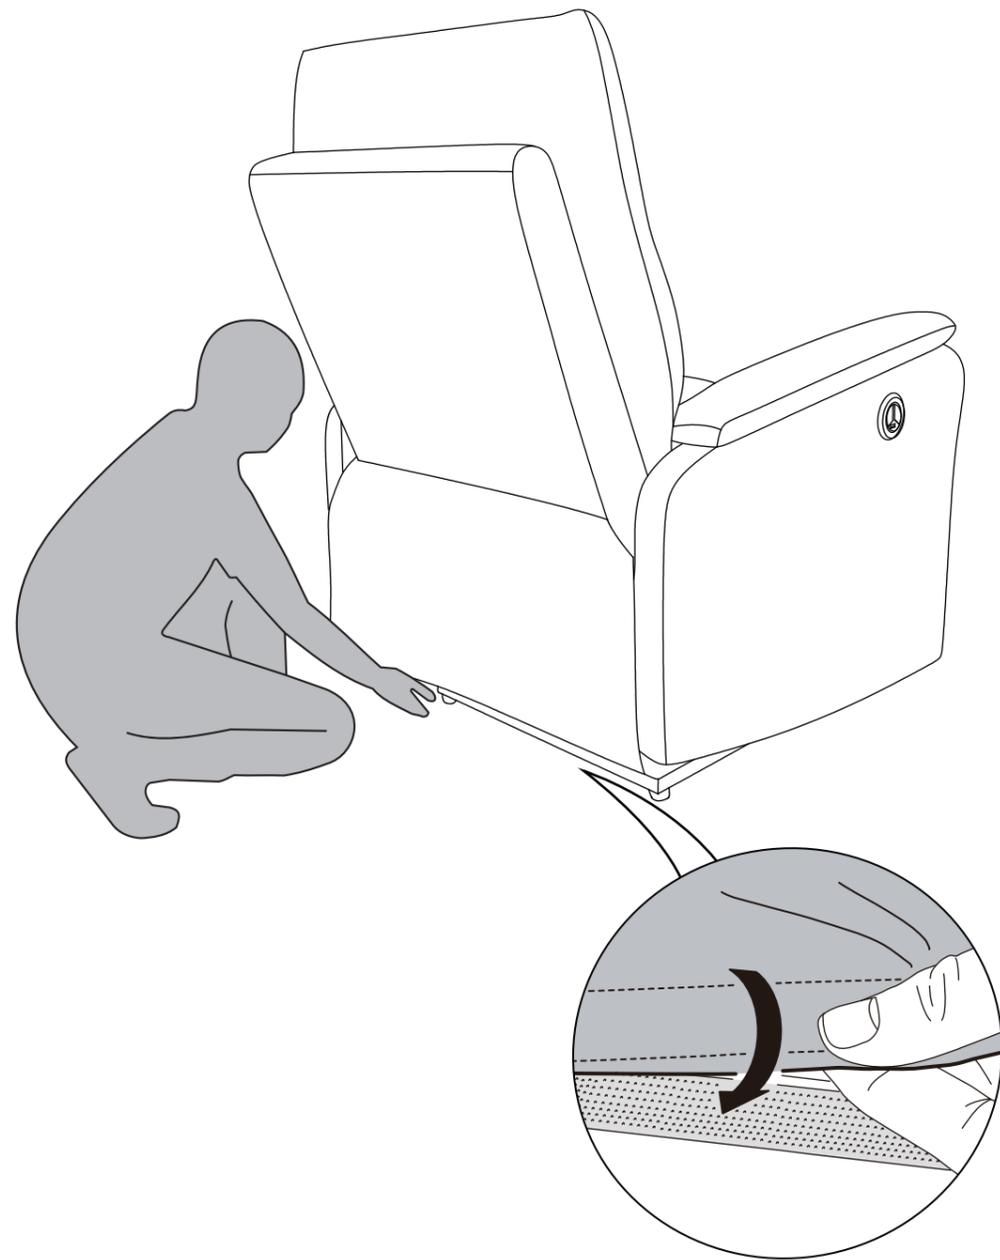

## Step5: SCHEMATIC DIAGRAM OF SWITCH USAGE

